



J Series Of Plastic Clamp Nozzle



KC-01
1" clamp



KC-02
1/2" Lamp



KC-03
3/4" lamp



KC-04
3/4" lamp



JK Series

It is installed in the pipe size of 1/2" 3/4" or 1" with the size of orifice is 3/8". The pressure is 320 bar for accessories.


Part No	Folder tube
JK7421-1/2-NYB	1/2" Lamp
JK7421-3/4-NYB	3/4" lamp
JK7421-1-NYB	1" clamp



The standard material for gasket is PP while Viton is available. Gaskets fixed in spray caps are installed on spray tips.

The interchangeable spray tips whose operating pressure limit is 20 bar, are made from PP/SS/BRASS.

Grooves are designed in spray caps to fix the lugs. The spray caps are made from nylon.

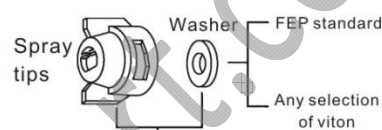

Quick removable tips and gasket

Spray tips tips are replaced used		Quick removable tips	Part No	
			Spray tips	Quick removable tips and gasket
	Standard model No of flat fan spray tip (on the small side flow) to SJC-CC-08		CP25611-NY	25612-NYR
	Standard model No flat fan spray tip (comparatively large flow) is SJC-CC-10 to SJC-CC-20		CP25609-NY	25610-NYR

Metal clamp connector

Design features

Connector provides quick and economical method for the nozzle and other parts installation at piping. Only to drill a hole of fitting diameter, along the pipeline to slip the connector and screw the bolt tightly, lock up it at proper place. This special design not only avoids the jointing of screw thread, but also reduces the cost. It also can use to install the nozzle in the sustain pipe which without screw thread.

Connector body was made of steel bar, the joint size of exit can be choosing. If it must uninstall the nozzle after the connector installation, then this design prevents the connector running in the clip button.


This connector entrance can embed the pipeline, it avoid deposit enter into it and make the block reduce minimum. DingQing rubber tight fix the cushions that can make most material erode, it provides a well airproof condition.

Performance Data

The model No. are based on the max. size and heaviest weight

Folder deduction connectors	Clamp size		Outlet connection NPT or BSPT		Common material			Max. Pressure (bar)	Max. liquid (L/MIN)	Size				Net weight (kg)
	Pipe size (inch)	Outer pipe dia. (mm)			A	B	C			A (mm)	B Pipe orifice dia.	C Body inlet dia.	D (mm)	
7521	1/2	20-22	1/8	1/4	•	•	•	17	11	48	7.1mm	4.8mm	17.5	0.06
	3/4	25-27	1/8	1/4	•	•	•			54				
	1	32-35	1/8	1/4	•	•	•			57				
8370	1/4	39-43	1/4	3/8	1/2	•	•	9	45	70	17.5mm	11.1 or 14.3mm	20	0.17
	1/2	44-51	1/4	3/8	1/2	•	•			81				
	2	54-60	1/4	3/8	1/2	•	•			88				
						•	•							

A standard for galvanize metal clamp & bolt used in brass connector ;B standard for SS ;C standard for galvanize metal clamp & bolt used in SS connector



Ordering Information

7521 - B - 1 X 1/4

Connector Model Material code Clamp size Outlet connection NPT or BSPT (Outside)